



INDUSTRIES 3R

Danville Office

55, route 116 Ouest
Danville (Québec) Canada
J0A 1A0


Phone: 819-839-2793
Fax: 819-839-2797
Toll-free: 800-567-2728
E-mail: info@industries3r.com

OTHERS

3R437

Description

This polyester fabric is impregnated on both sides with EPDM rubber. It has excellent breaking strength.

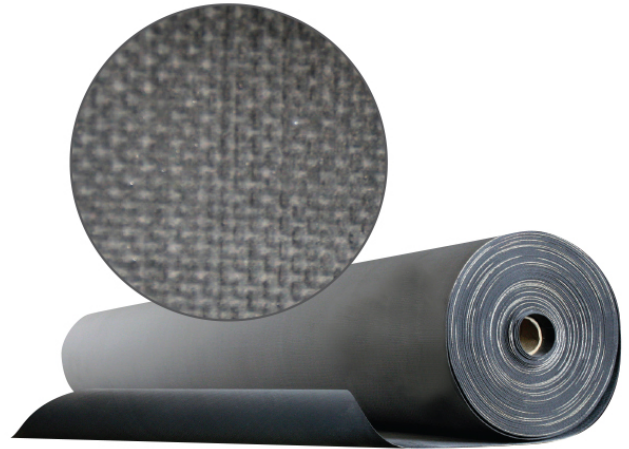

Applications

The 3R 437 is ideal for the fabrication of cylinder rod boots.

Specifications

Technical Data

Width	60"
Weight	39 +/- 2 oz/yd ²
Thickness	0.045" +/- 0.002"
Tensile strenght (ASTM D-751)	Wrap: 220 N, Fill: 220 N
Elongation (ASTM D-751)	Max. 30%
Tear strength (ASTM D-751)	Wrap: 1000 N, Chain: 1000 N
Hydrostatic resistance (ASTM D-751) 200 kPa min.	200 kPa min.

N.B. The information presented may differ from practice. We recommend conducting tests according to the conditions of use. We accept no responsibility for results obtained by the application of this information or the safety and suitability of our products. The data is subject to certain variations without notice.