



INDUSTRIES 3R

Danville Office

55, route 116 Ouest
Danville (Québec) Canada
J0A 1A0


Phone: 819-839-2793
Fax: 819-839-2797
Toll-free: 800-567-2728
E-mail: info@industries3r.com

OTHERS

C24

Description

The C24 sealing tape is made of pure PTFE particles. It is moldable, dry and non-hardening.

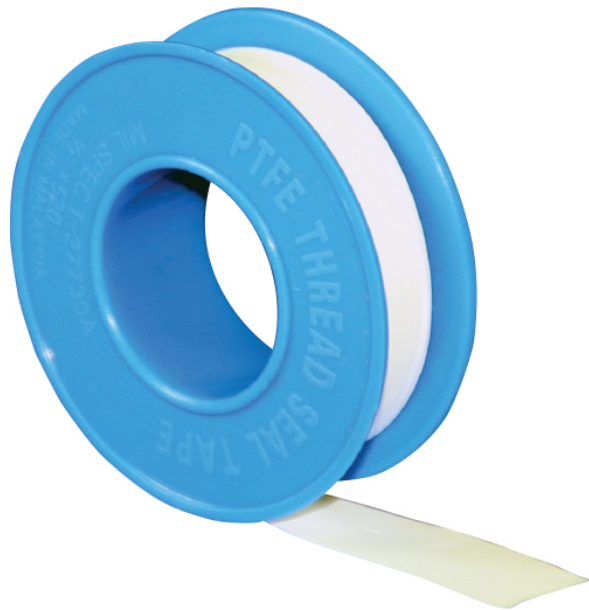

Applications

Easy to install, it penetrates in the treading during manual tightening and does not tear when the threads are screwed. This efficient tape can be easily applied to all metal or plastic pipes. It remains flexible to resist vibration and permits easy disassembly of connections when required.

Specifications

Technical Data

Temperature	-260°C to 310°C (-435°F to 590°F)
Pressure	2 900 psi
pH	0-14
Density	39 lbs/ft ³
Elongation	120 %
Thickness	0.003"
Width	1/4", 1/2", 3/4", 1"

Length	520"/roll
--------	-----------

N.B. The information presented may differ from practice. We recommend conducting tests according to the conditions of use. We accept no responsibility for results obtained by the application of this information or the safety and suitability of our products. The data is subject to certain variations without notice.