



INDUSTRIES 3R

Danville Office

55, route 116 Ouest
Danville (Québec) Canada
J0A 1A0


Phone: 819-839-2793
Fax: 819-839-2797
Toll-free: 800-567-2728
E-mail: info@industries3r.com

VULCANIZED PAPERS

NOMEX 410

Description

Designed as an electric insulation, the Nomex 410 is a synthetic paper that presents a good dielectric strength. It is compatible with all classes of resins, varnishes, glues, transformer liquids, lubricating oils and usual refrigeration agents. The Nomex 410 can be used in a majority of electrical equipment application. This vulcanised paper is available in many thicknesses and dimensions. We can also cut the material according to your specifications.

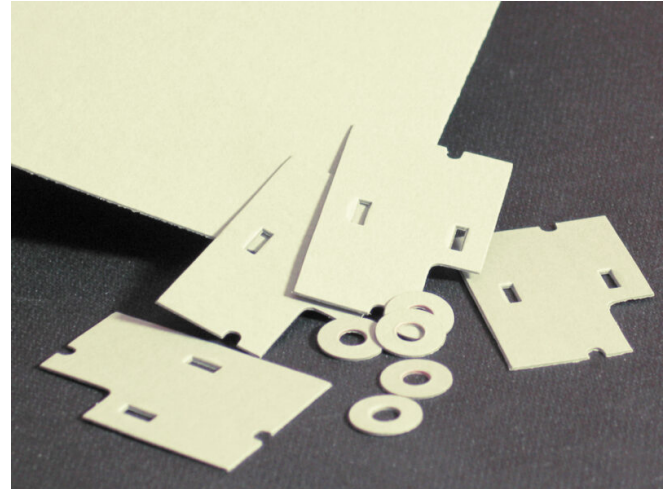

Applications

The Nomex 410 is used in almost every electrical sheet insulation application. Its application scope extends from DC to AC motors and generators, and also dry and oil cooled transformers.

Specifications

Electrical properties

Dielectric resistance - AC rapid rise (ASTM D-149)

Thickness of 0.25mm (0.010")	32 kV/mm
------------------------------	----------

Thickness of 0.38mm (0.015")	33 kV/mm
------------------------------	----------

Dielectric resistance - Full wave impulse (ASTM D-3426)

Thickness of 0.25mm (0.010")	63 kV/mm
------------------------------	----------

Thickness of 0.38mm (0.015")	55 kV/mm
------------------------------	----------

Mechanical properties

Weight

Thickness of 0.25mm (0.010")	249 g/m²
Thickness of 0.38mm (0.015")	397 g/m²
Density (g/cc)	
Thickness of 0.25mm (0.010")	0.96
Thickness of 0.38mm (0.015")	1.03
Tensile strength (N/cm)	
Thickness of 0.25mm (0.010")	Machine direction: 285, Cross direction: 152
Thickness of 0.38mm (0.015")	Machine direction: 459, Cross direction: 252
Elongation (%)	
Thickness of 0.25mm (0.010")	Machine direction: 19, Cross direction: 15
Thickness of 0.38mm (0.015")	Machine direction: 19, Cross direction: 14
Elmendorf tear (N)	
Thickness of 0.25mm (0.010")	Machine direction: 6.0, Cross direction: 10.8
Thickness of 0.38mm (0.015")	Machine direction: 9.5, Cross direction: 17.2
Tear strenght (N) ASTM D-1004	
Thickness of 0.25mm (0.010")	Machine direction: 71, Cross direction: 42
Thickness of 0.38mm (0.015")	Machine direction: 116, Cross direction: 74
Shrinkage at 300°C (%)	
Thickness of 0.25mm (0.010")	Machine direction: 0.4, Cross direction: 0.1
Thickness of 0.38mm (0.015")	Machine direction: 0.3, Cross direction: 0.2

Thermal Properties	
Thermal conductivity at 150°C (mWatt/mK)	
Thickness of 0.25mm (0.010")	139
Thickness of 0.38mm (0.015")	149

N.B. The information presented may differ from practice. We recommend conducting tests according to the conditions of use. We accept no responsibility for results obtained by

the application of this information or the safety and suitability of our products. The data is subject to certain variations without notice.