


FIBERGLASS

TACKY M

Description

The Tacky M is a fiberglass fabric with a brass wire insertion and is impregnated with a natural rubber solution. This coating resists to high temperatures and increases the pressure resistance of the fabric.

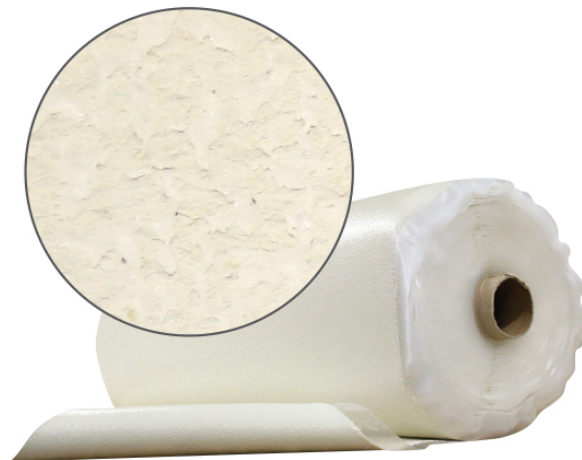

Applications

This fabric is currently used in the fabrication of handhole and manhole gaskets and sealing tapes.

Specifications

Technical Data	
Thickness	1/16", 1/8", 3/16", 1/4"
Width	40"
Temperature	200°C (390°F)
Pressure	180 psi
Resistance	Steam, water, mild alkalis and acids
Weight	64 oz/yd ²

N.B. The information presented may differ from practice. We recommend conducting tests according to the conditions of use. We accept no responsibility for results obtained by the application of this information or the safety and suitability of our products. The data is subject to certain variations without notice.