



INDUSTRIES 3R

Danville Office

55, route 116 Ouest
Danville (Québec) Canada
J0A 1A0


Phone: 819-839-2793
Fax: 819-839-2797
Toll-free: 800-567-2728
E-mail: info@industries3r.com

FIBERGLASS

TXP1106G

Description

Graflex™ is a graphite and silicone oil treatment which when applied to the cloth confers much better resistance to flex abrasion in arduous, high temperature environments. This cloth has a high degree of stability, flexibility and strength.

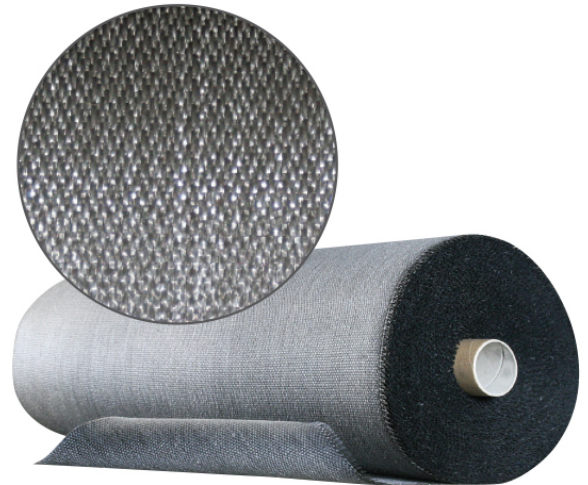

Applications

Offering a high resistance to flame, flexibility and abrasion, this cloth is an excellent choice for protective cushions. The «Graflex» fabric is also recommended for applications in presence of humidity.

Specifications

Technical Data

Weight	1150 g/m ²
Thickness	1.6mm
Width	100cm
Length	50m/roll
Temperature	Continuous: 600°C (1112°F), Short term: 1000°C (1832°F)

N.B. The information presented may differ from practice. We recommend conducting tests according to the conditions of use. We accept no responsibility for results obtained by the application of this information or the safety and suitability of our products. The data is subject to certain variations without notice.