



INDUSTRIES 3R

Danville Office

55, route 116 Ouest
Danville (Québec) Canada
J0A 1A0


Phone: 819-839-2793
Fax: 819-839-2797
Toll-free: 800-567-2728
E-mail: info@industries3r.com

FIBERGLASS

TXP125S

Description

This fiberglass tape is coated with a silicone.

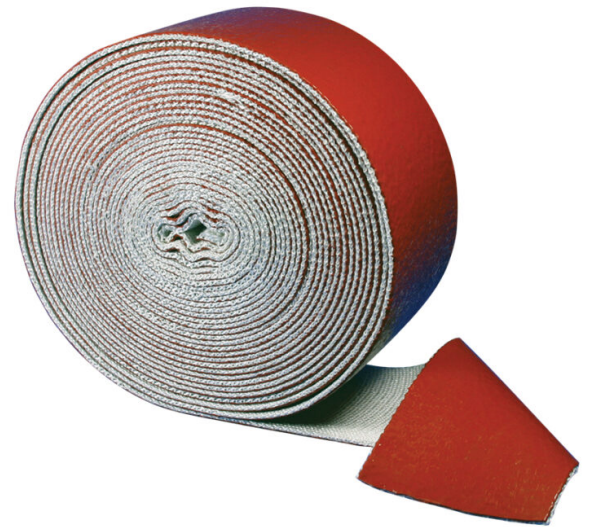

Applications

The TXP125S offers an excellent protection for hydraulic hoses and it resists really well to molten metal splatter. It is beneficial to use this tape to wrap cables and piping since it is not necessary to sever connections.

Specifications

Technical Data

Temperature	Continuous: 500°F (260°C), Short Term: 3000°F (1650°C)
Nominal thickness	0.147" (3.73mm)
Molten splash resistance	Outstanding
Flame resistance	Very good
Abrasion resistance	Very good
Flexibility	Outstanding
Water and oil resistance	Outstanding

N.B. The information presented may differ from practice. We recommend conducting tests according to the conditions of use. We accept no responsibility for results obtained by the application of this information or the safety and suitability of our products. The data is subject to certain variations without notice.

