



INDUSTRIES 3R

Danville Office

55, route 116 Ouest
Danville (Québec) Canada
J0A 1A0


Phone: 819-839-2793
Fax: 819-839-2797
Toll-free: 800-567-2728
E-mail: info@industries3r.com

FIBERGLASS

TXP1306W

Description

The TXP1306W exhibits a great resistance to long term exposure to high temperatures without degradation. Its ability to withstand molten metal splash and flame penetration has been enhanced by recent developments in the Weldstop® finish.

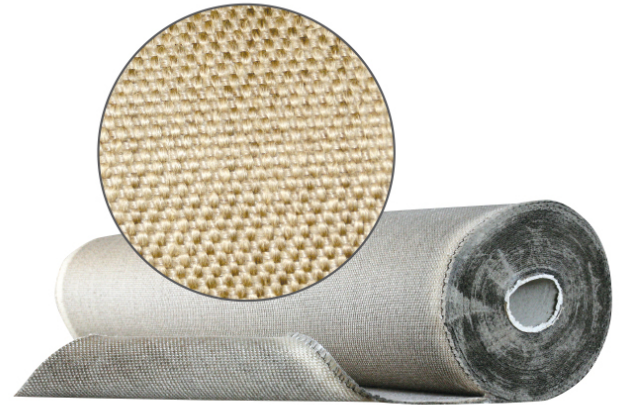

Applications

Welding & stress blankets and curtains
Insulation gasketing and pads
Safety clothing (aprons and mitts)
Pipe wrap and expansion joints

Specifications

Technical Data

Temperature	750°F (400°C)
Weight	43 oz/yd ²
Thickness	0.067"
Width	40"
Length	25 m/roll

N.B. The information presented may differ from practice. We recommend conducting tests according to the conditions of use. We accept no responsibility for results obtained by the application of this information or the safety and suitability of our products. The data is subject to certain variations without notice.