



INDUSTRIES 3R

Danville Office

55, route 116 Ouest
Danville (Québec) Canada
J0A 1A0


Phone: 819-839-2793
Fax: 819-839-2797
Toll-free: 800-567-2728
E-mail: info@industries3r.com

FIBERGLASS

TXP175

Description

This fabric is tough, flexible and versatile. It is produced with high quality texturized fiberglass yarns. It will not burn nor emit harmful smoke or vapors when exposed to high temperatures, will not mold and resists most acids and alkali.

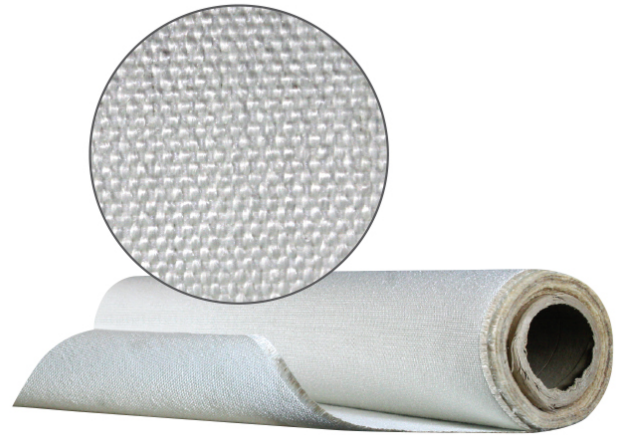

Applications

- Heat shields
- Fire blankets
- Welding curtains
- Protection apparels
- High temperature removable blankets
- Expansion joints
- Wrapping tools, pipes, cables to protect against high temperatures.

Specifications

Technical Data

Weight	18.0oz/yd ²
Thickness	0.036"
Width	40", 60"
Temperature	Continue: 535°C (1000°F), Brief excursion: 645°C (1200°F)
Length	50 yd/roll
K Factor	0.419
Certifications	Incombustibility: USCG 164.009

N.B. The information presented may differ from practice. We recommend conducting tests according to the conditions of use. We accept no responsibility for results obtained by the application of this information or the safety and suitability of our products. The data is subject to certain variations without notice.