



INDUSTRIES 3R

Danville Office

55, route 116 Ouest
Danville (Québec) Canada
J0A 1A0


Phone: 819-839-2793
Fax: 819-839-2797
Toll-free: 800-567-2728
E-mail: info@industries3r.com

FIBERGLASS

TXP175LA

Description

This fiberglass cloth is laminated with a stainless steel foil on one side. It has a higher resistance to chemical products, moisture and corrosive environments.

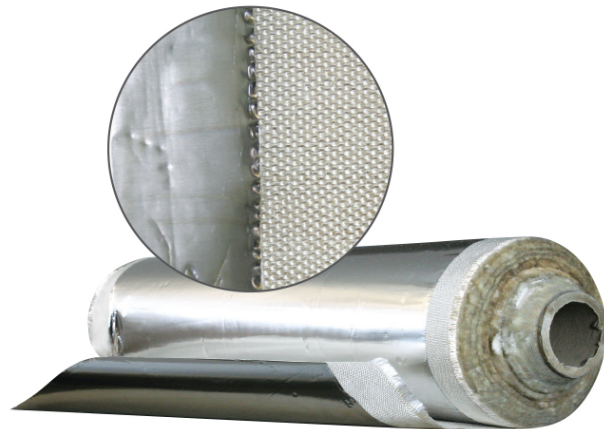

Applications

The TXP 175LA is used as a liner material in removable blankets or mattresses to prevent absorption of corrosive liquids.

Specifications

Technical data

Weight	19oz/yd ²
Thickness	0.026"
Tensile strenght (ASTM D-5035)	Warp: 250 lbs/in, Fill: 200 lbs/in
Tear strength (ASTM D-5587)	Warp: 50 lbs, Fill: 50 lbs
Temperature	150°C (300°F)
Burst strength (ASTM D-3786)	550psi

N.B. The information presented may differ from practice. We recommend conducting tests according to the conditions of use. We accept no responsibility for results obtained by the application of this information or the safety and suitability of our products. The data is subject to certain variations without notice.