



INDUSTRIES 3R

Danville Office

55, route 116 Ouest
Danville (Québec) Canada
J0A 1A0

Phone: 819-839-2793
Fax: 819-839-2797
Toll-free: 800-567-2728
E-mail: info@industries3r.com


FIBERGLASS

TXP415A

Construction

Description

The TXP415A is a satin weaved fiberglass fabric coated with a silver rubberized silicone. It resists abrasion, flexing, tear and puncturing. It protects from water, oil and chemical products and generates little smoke.

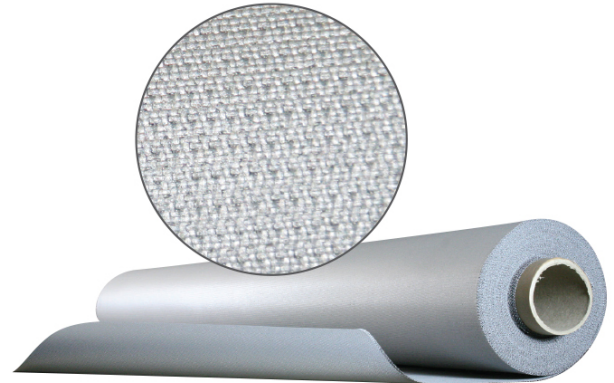

Applications

This cloth is designed for removable insulation blankets, dust protection, welding protection and other fire control systems.

Specifications

Technical data

Color	Silver Grey
Weight (ASTM E84-12)	15.6 ± 0.74 oz/yd ²
Thickness (ASTM E84-12)	0.016 ± 0.0007"
Fire resistance (NFP 92507)	EN13501-1:A2
Temperature resistance Glass Fabric	Up to 1000°F (550°C)
Temperature resistance Silicone rubber coating	Up to 480°F (250°C)

N.B. The information presented may differ from practice. We recommend conducting tests according to the conditions of use. We accept no responsibility for results obtained by the application of this information or the safety and suitability of our products. The data is subject to certain variations without notice.