



INDUSTRIES 3R

Danville Office

55, route 116 Ouest
Danville (Québec) Canada
J0A 1A0


Phone: 819-839-2793
Fax: 819-839-2797
Toll-free: 800-567-2728
E-mail: info@industries3r.com

FIBERGLASS

TXP428

Description

The TXP428, yellow and coated with a fire retardant acrylic, is non-combustible and resists sparks, projections and abrasion. This fabric is lock stitched with heat resistant fiberglass thread.

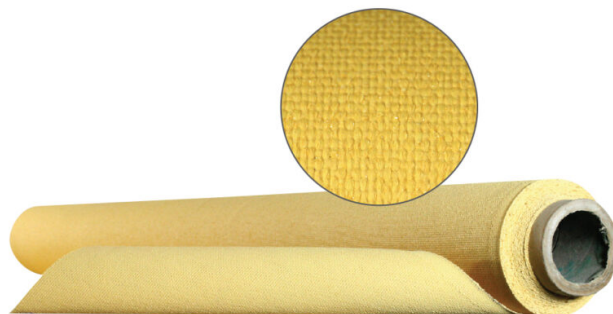

Applications

The TXP428 is recommended for the manufacture of vertical welding curtains to contain sparks, spatter and heat.

Specifications

Données techniques	
Weight	24, 35 oz/yd ²
Thickness	0,022", 0,036"
Temperature	538°C (1000°F)

N.B. The information presented may differ from practice. We recommend conducting tests according to the conditions of use. We accept no responsibility for results obtained by the application of this information or the safety and suitability of our products. The data is subject to certain variations without notice.