



industries3r.com

Danville office

Industries 3R inc.
55, Road 116 West
Danville (Quebec)
Canada J0A 1A0

Telephone: (819) 839-2793
Fax: (819) 839-2797
Toll-free: (800) 567-2728
Email: info@industries3r.com

Montreal office


Industries 3R inc.
1479, Begin street
Ville St-Laurent (Quebec)
Canada H4R 1V8

Telephone: (514) 333-3971
Fax: (514) 333-7224
Email: info@industries3r.com

3R815LC

RUBBER

The 3R815LC offers similar specifications found in the top quality 3R815 neoprene rubber. It can be used in many applications where less particularities are required. It is provided in three different durometers.

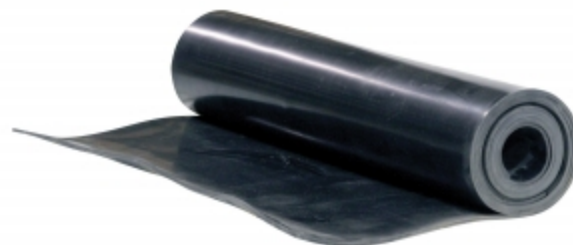

APPLICATIONS

This material can be used as flange gasketing and as static joints. It is also used in applications where the material is in contact with harsh atmospheric conditions.

SPECIFICATIONS

Technical Data

Polymer	CR
Color	Black
Hardness (Shore A) \pm 5	60
Temperature	-25°C to 85°C (-10°F to 185°F)
Tensile Strength	500psi nom.
Elongation	300% min.
Compression Set	Good
Abrasion Resistance	Good
Tear Resistance	Good
Ozone Resistance	Fair
Impermeability to Gases	Fair to Good
Resistance to Dilute Acid	Fair
Résistance to aromatic hydro-carbons	Fair
Heat Aging	Fair

N.B. The information presented may differ from practice. We recommend conducting tests according to the conditions of use. We accept no responsibility for results obtained by the application of this information or the safety and suitability of our products. The data is subject to certain variations without notice.